



INTRODUCING

THERMTEK FL DOORS

THE REVOLUTIONARY ALUMINIUM DOOR FOR ANY HOME



THE REVOLUTIONARY NEW ALUMINIUM DOOR UTILISING INNOVATION AND TECHNOLOGY FOUND NOWHERE ELSE IN THE WORLD.

Whilst Parkwood's new flush aluminium door has a refined look and improved quality finish (new cap system), its inside construction is a whole new story.

With the changes in the building code, doors and windows will eventually require an R rating of 0.47 or 0.50 depending on the climate zone.





The New Thermtek FL door comes with an R rating of 0.56 for a door 1980 x 860mm which will exceed the new building code requirements anywhere in New Zealand.


This R rating will improve as the door gets larger. Large smooth surfaces heat up quickly, causing movement. Doors with big plastic thermal breaks will bow. Doors without thermal breaks transfer heat inside – like an unwanted heater on a hot summer day. The reverse happens in winter.

However!

With Parkwood's new Thermtek FL door, its outside face is able to withstand extreme temperatures and the accompanying movement caused when aluminium heats up. Due to the thermal construction, this movement is not passed onto the other side of the door.


This means you can have a black aluminium door in full sun, with no resulting issues in longevity or door movement (very minimal bowing or twisting). New Zealand Patent 789854, Australian Patent 2022204602.

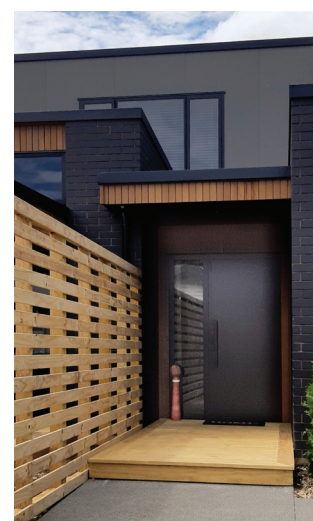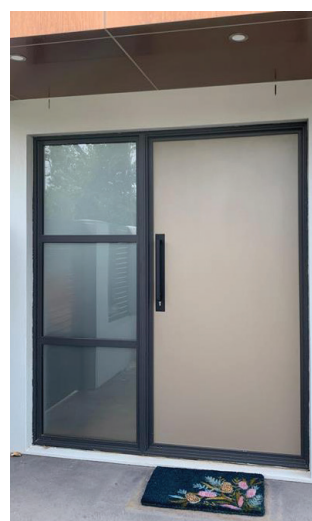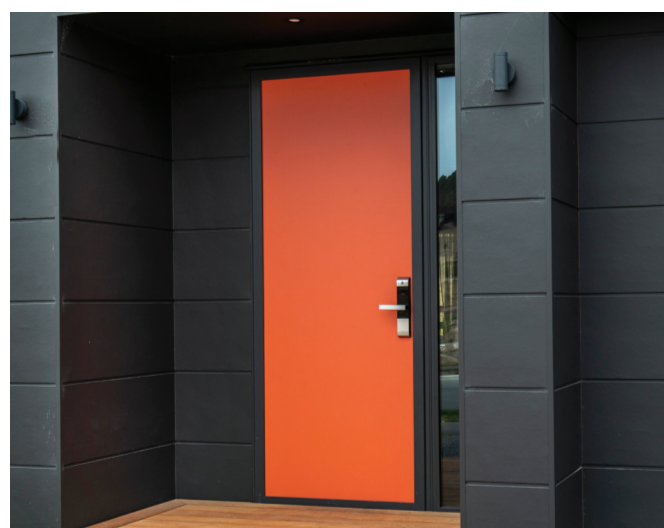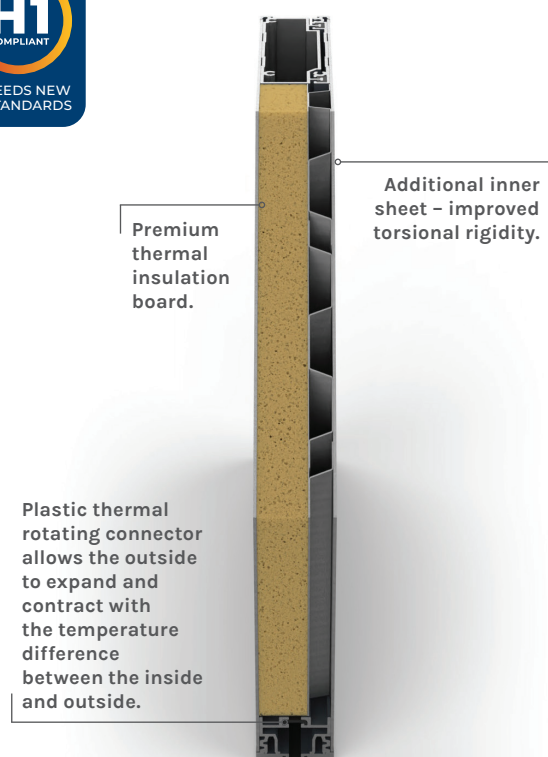

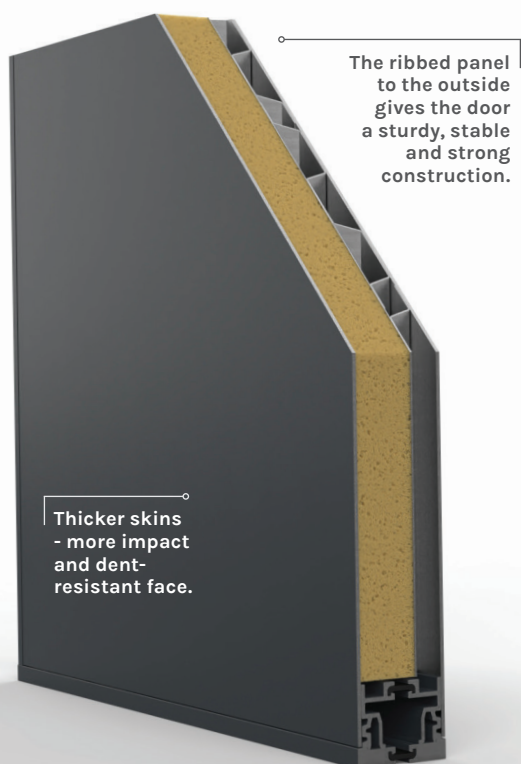

Radius edges:
Looks better.
Feels nicer.

Dual colour
change on the
door edge.

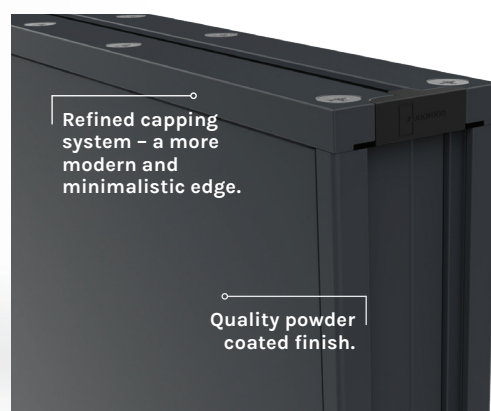

	THERMTEK FL (NEW THERMTEK FLUSH DESIGN)	THERMTEK CFL (OLD THERMTEK FLUSH DESIGN)
R Rating *Door size 1980x860mm	0.56	0.28
Max size	2900 x 1300mm	2650 x 1200mm
Thickness	41mm	42mm
Thermally broken	Yes *(Subject to hardware and fittings)	No
Dual colour	Yes - colour change on door edge	Yes - colour change on door face
Stile edge radius	1.5mm	1mm
Border size	8mm top and bottom. 6mm edges	16mm
Skin thickness	1.6mm	1.2mm
Weight *Door size 1980x860mm	28kg	31kg
Flush face	Yes (No capping)	No (Has capping)
Bow test result *Door size 2400x1000mm	2mm @ 50° temperature difference	6mm @ 50° temperature difference
RP8 Seal available	Yes	No

FL DOOR RANGE

KEY:

 THERMTEK DOORS
 THERMTEK DOORS - 50MM



ATFL00
ALFL00



ATFL01
ALFL01




ATFL09
ALFL09



ATFL10
ALFL10



ATFL11
ALFL10



ATFL13
ALFL13



ATFL14
ALFL14




ATFL21
ALFL21




ATFL24
ALFL24




ATFL48
ALFL48




ATHV00
ALHV00




ATHV02
ALHV02



ATHV03
ALHV03



ATHV04
ALHV04



ATHV05
ALHV05



ATSV03
ALSV03



ATSV04
ALSV04



ATVV00
ALVV00



ATVV03
ALVV03



ATVV01
ALVV01




ATVV09
ALVV09



ATVV10
ALVV10



ATVV11
ALVV11



ATVV13
ALVV13



ATVV14
ALVV14



ATVV21
ALVV21



ATVV24
ALVV24



ATVV48
ALVV48




ATVV50
ALVV50



ATVV51
ALVV51



ATVV52
ALVV52



ATVV53
ALVV53



NEW ZEALAND | 0800 10 10 28
sales@parkwooddoors.co.nz
parkwooddoors.co.nz
AUSTRALIA | 1800 681 586
sales@parkwooddoors.com.au
parkwooddoors.com.au

10122MARCH24