


INTRODUCING DURAMAX PLUS ENTRANCE DOORS

REPRESENTING INNOVATION AND QUALITY

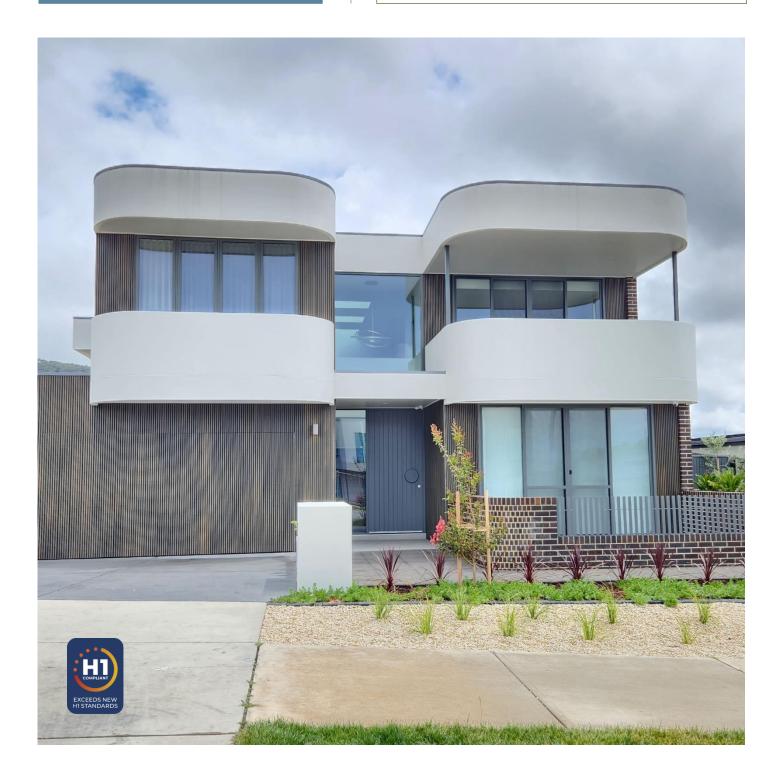

WE ARE EXCITED TO INTRODUCE OUR LATEST INNOVATION – DURAMAX PLUS! BUILDING ON THE SUCCESS OF THE ORIGINAL DURAMAX, WE HAVE ENHANCED ITS FEATURES TO PROVIDE YOU WITH AN EVEN BETTER DOOR.


- → Advanced anti-bowing technology: Added fibreglass 'pultrusion', in the lock stile of the door.
- → Improved thermal ratings: Ensure easy compliance with better thermal efficiency.
- → **Exceptional Stability**: Tested and proven to offer stability comparable to aluminium doors.
- → Advanced Skin Chemistry: Our new skin chemistry minimizes expansion and contraction, significantly reducing door bowing.
- → Superior Gluing Process: Improved bonding of the skin to the structure that promises longevity.
- → Better For Multi-Point Locks: Parkwood can machine out for 3 & 4 point locks in the pultrusion.
- → Smooth Vision Panels: New glazing beads ensure a sleek, modern look.









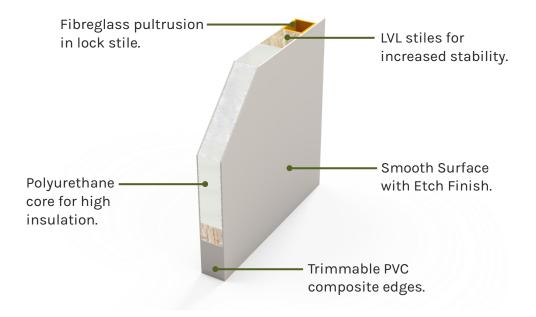


DURAMAX PLUS

R-Value
Door size 1980 x 860mm0.95Max Size2400 x 1060mmThickness40mmWeight
Door size 1980 x 860mm26.4kgTorsion per NZS 42113mmBow test results at 50°C
Door size 2200 x 1060mm2.8mm
Duramax.

NOTE: DRILLING FOR MORTICE LOCKS: The pultrusion makes conventional morticing techniques difficult. Parkwood recommend getting the door premachined for mortice locks. If this is not possible, follow this guide:



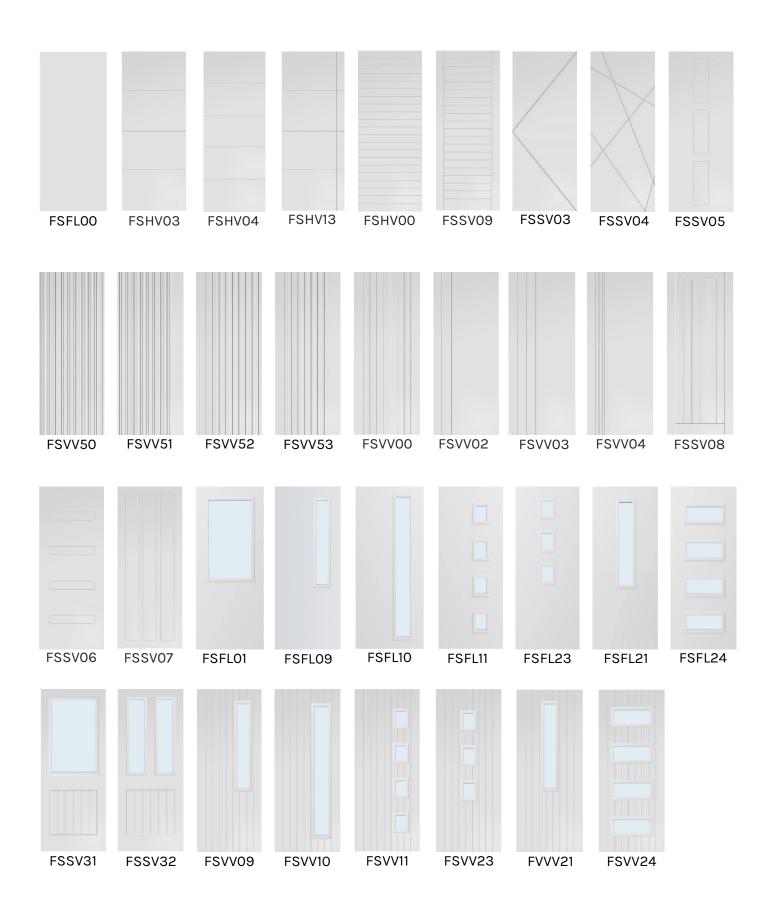

NEW ZEALAND | 0800 10 10 28 sales@parkwooddoors.co.nz parkwooddoors.co.nz



AUSTRALIA | 1800 681 586 sales@parkwooddoors.com.au parkwooddoors.com.au Sept2024