


EXTERIOR DOOR INSTALLATION

Designed to withstand the extremes of New Zealand weather conditions. They won't rust, rot, twist, or dent, and do not have to be sheltered! Our most affordable door range, with the best insulation, supplied ready to paint or you could take advantage of our high-quality painting service.

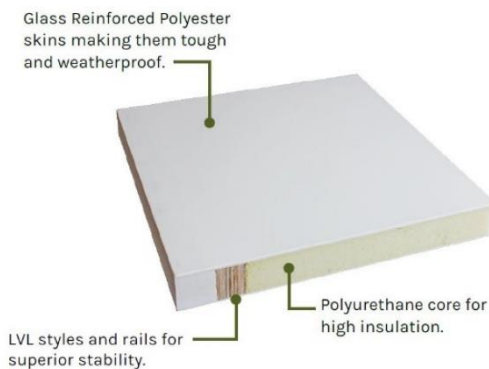

- 10-year warranty.
- LVL styles and rails for superior stability.
- Solid resin edges - clean and tidy which can be trimmed or rebated.
- Glass Reinforced Polyester skins making them tough and weatherproof even in extreme weather.
- Polyurethane core for high insulation.
- R value of at least 0.60 on unglazed doors (calculated as per ISO 10077-1 Third Edition 2017-6).

Duramax doors can be buzzed, trimmed, bogged, sanded, and drilled just like a timber door. The PVC edge is easy to work with and is quite malleable.

Their skin can chip during trimming, so we recommend either pre-scoring along the trim line or masking the faces before trimming.



They can be trimmed up to **25mm in width and 40mm in height (equal amounts off both edges)**.

The final edge can be sanded and groomed just like timber.

When it comes to painting the Duramax door, the only difference from a timber door may be the primer, although a lot of primers nowadays work on fibreglass. We highly recommend Dulux Precision Maximum Strength Adhesion Primer or Resene Quick Dry Primer Undercoat.

See how to drill a lock and hinges into a Duramax composite door:



Check out our finishing suggestions here:

